

## CHARACTERISTICS

- FOR OIL
- COMPATIBLE WITH RECIRCULATION SYSTEMS
- RESERVOIR: 3 L
- FLOW RATE: 0.35 L/MIN.
- RELEASE VALVE INCLUDED
- ADJUSTMENT VALVE PRESSURE INCLUDED


## ELECTRIC GEAR PUMP FOR AUTOMATIC OIL LUBRICATION SYSTEMS

The **3905027 pump** is the DropsA lubrication control unit designed to operate primarily on oil-recirculation systems.

The pump does not only operate as a lubricating agent, but also permits heat to be removed from the buffer zone.

The control system is equipped with an automatic system that interrupts operation if there is a lack of lubricant in the reservoir, thereby acting as a safety system and guaranteeing the integrity of the pump.

The pump is equipped with a pre-assembled safety bypass valve and a pressure gauge.

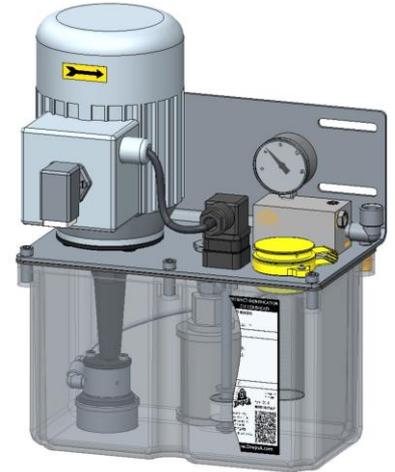


## TECHNICAL INFORMATION

TECHNICAL SPECIFICATIONS	
Maximal operation pressure	10 bar
Flow rate	0.35 L/min.
Bypass setting	6 bar
Reservoir capacity	3 litres
Motors	1PH-230V-50HZ-0.09kW-4poli-GR56
Lubricant type and viscosity	32÷1000 cSt oil
Operating temperature	+5°C ÷ +60°C
Pressure gauge	0÷16 bar
Suction filter	400 µ
Return filter	60 µ

## APPLICATIONS

LUBRICATION SYSTEM FOR PRESSES, MACHINE TOOLS, GEAR UNITS, GUIDES AND CHAINS

## DIMENSIONS (NOT TO SCALE)

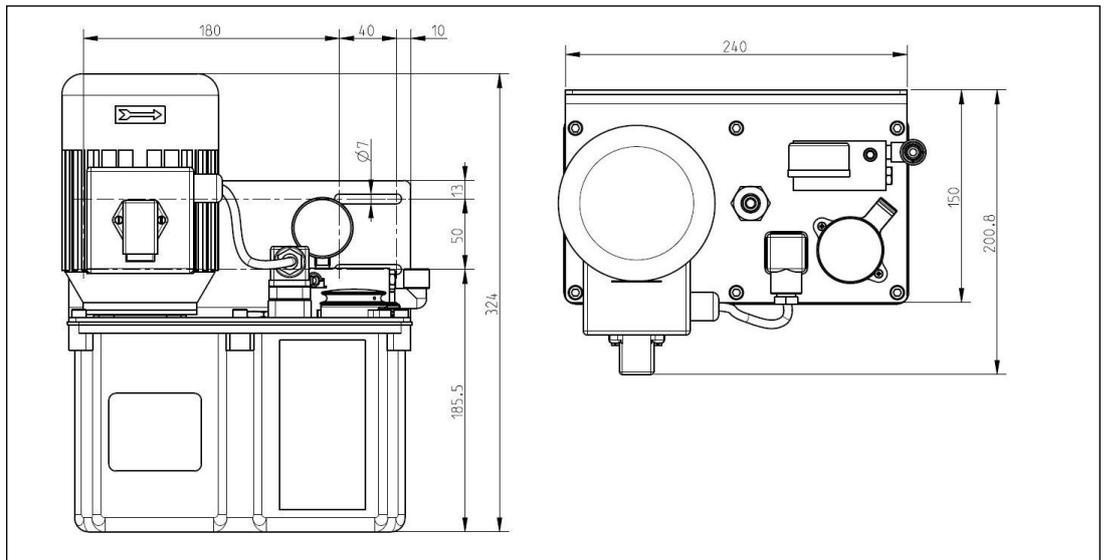

## ORDER INFORMATION

DESCRIPTION	CODE
GEAR PUMP	3905027

Distributor Info: