


Bandsaw lubrication is required when cutting wood using a bandsaw machine.



The bandsaw is mainly use for cutting wood and they tend to be larger than standard circular saws for cutting steel.

The actual bandsaw blade is what has to be lubricated.

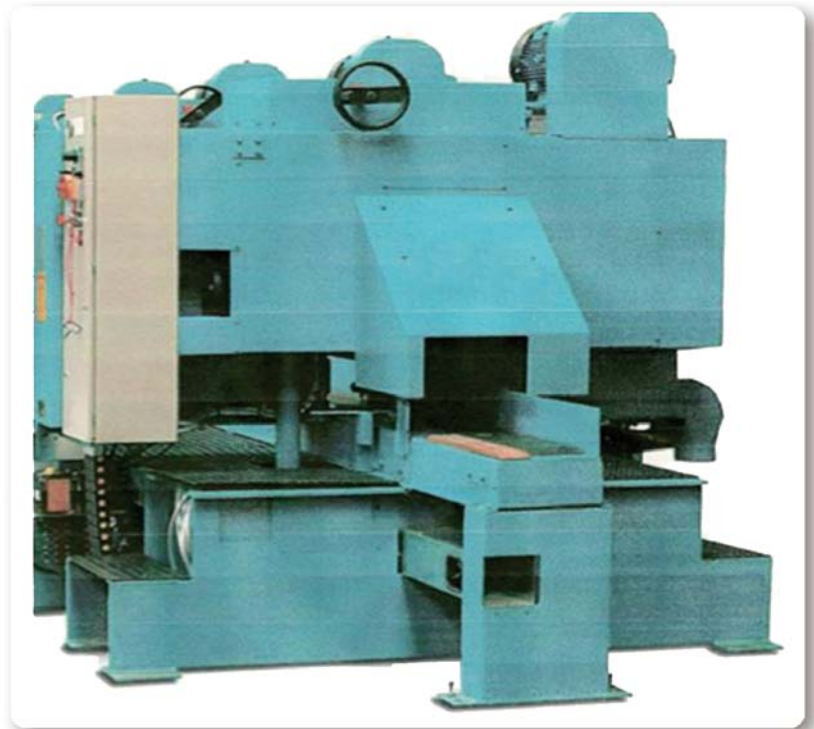

Analysis of the lubrication system

1. The bandsaw can vibrate and move out of position by upto 6mm. The dropsa design of saw blade attachment allows for this vibration. Competitors attachments can be damaged when this vibration occurs.
2. The unit should be mounted as at the same level of the nozzles or higher. The stenner photo shows it mounted low which can cause some issues. So best to mount higher up.
3. In a sawmill it becomes very dusty. The sawdust gets everywhere including in the oil when they refill. Therefore it should be protected and mounted in a box if possible.

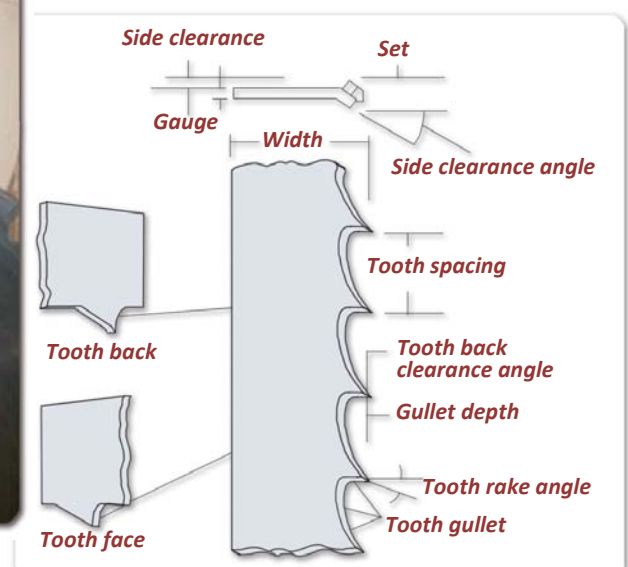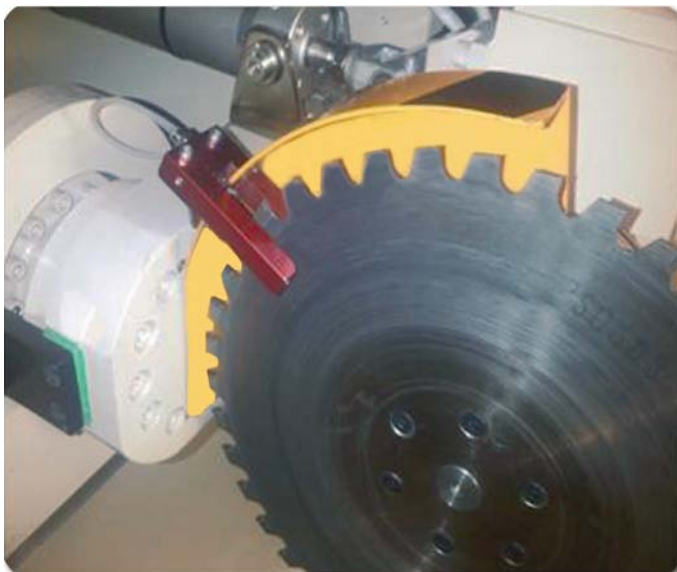

DropsA proposed:

- **Vip4 Air**
- **3132583 nozzle**
- **1524569 nozzle**

Vip4 Air

