



CHARACTERISTICS

Number of outlets:

- 2 or 4

Dosing volume per outlet:

- 230 mm³

Ambient temperature:

- from 32 to 212 °F

Operating pressure:

- 100 bar (1450 psi)

Progressive divider VD

Progressive dividers in block design available with 2 or 4 lubrication outlets.

The progressive divider VD is suitable for lubrication with fluid grease or grease.

TECHNICAL INFORMATION

General

Type	Block distributor
Lubrication line connection	M12 x 1
Ambient temperature	From 32 to 212°F (from 0 to 100 °C)


Hydraulic system

Operating pressure	100 bar (1450 psi)
max. flow rate	0.1 l/min
Operating medium	Fluid grease, grease
Range of viscosity	NLGI 000-2
Dosing volume	230mm ³ /outlet




IDEAL FOR

- Lubrication with fluid grease or grease

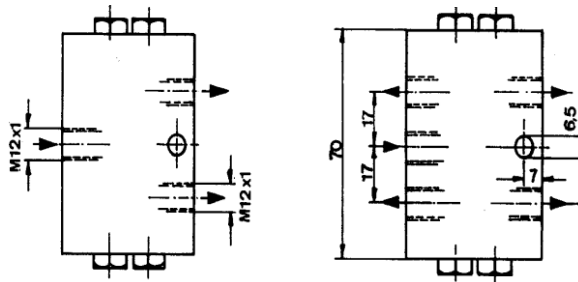

APPLICATIONS

- Small machines
- Single point lubrication with fluid grease or grease

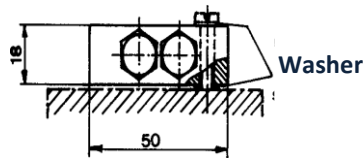

Ordering information

Number of outlets	Order number
2	P30020265
4	P30020266

Ordering information for accessories

Accessories	Connection	Order number
Sealing cone	∅ 4 mm	P30225002
	∅ 6 mm	P30225001
Male fitting	∅ 4 mm M12 x 1	P30256608
	∅ 6 mm M12 x 1	P30256609
Straight pipe fitting	∅ 8 mm M12 x 1	P30044150
	∅ 10 mm M12 x 1	P30044233
Retaining screw	M6 x 30	P62006052
Washer	A 6.4	P62044003

